

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2001-210518

(43)Date of publication of application : 03.08.2001

(51)Int.Cl.

H01F 10/14

(21)Application number : 2000-052507

(71)Applicant : TOKIN CORP

(22)Date of filing : 24.01.2000

(72)Inventor : YOSHIDA EIKICHI

ONO YUJI

ANDO SHINSUKE

RI MORIHARU


SHIMADA HIROSHI

(54) MAGNETIC LOSS MATERIAL, METHOD OF MANUFACTURING THE SAME AND HIGH-FREQUENCY CURRENT SUPPRESSION BODY USING THE MATERIAL

(57)Abstract:

PROBLEM TO BE SOLVED: To provide a magnetism loss material of superior high-frequency magnetic loss characteristic which is very effective in rejecting high-frequency conduction noise of a fine electronic circuit integrated in high density, such as a semiconductor integrated circuit element, and to provide a method of manufacturing the same and a high-frequency current suppressing body using it.

SOLUTION: This magnetic loss material comprises M (M is one of Fe, Co, and Ni, or their mixture), X (X is an element other than M and Y, or their mixture), and Y (Y is one of F, N, and O, or their mixture). A maximum value μ''_{max} of a loss item μ'' of the magnetic loss material is in a frequency range of 100 MHz-10 GHz, and the half-value width of μ''_{50} that standardizes the frequency band where the μ''_{50} is not less than 50% with respect to the μ''_{max} by using the center frequency which is within 200%.

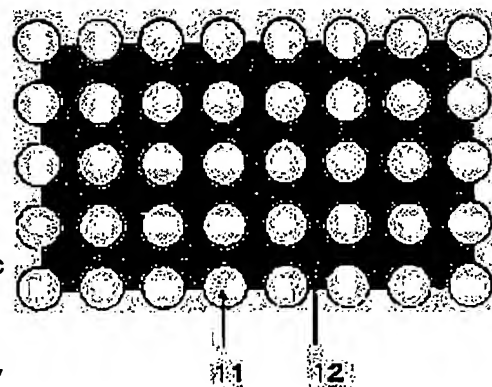

LEGAL STATUS

[Date of request for examination]

18.03.2003

[Date of sending the examiner's decision of rejection]

13.04.2005

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office